


## 殺菌燈外觀參考圖

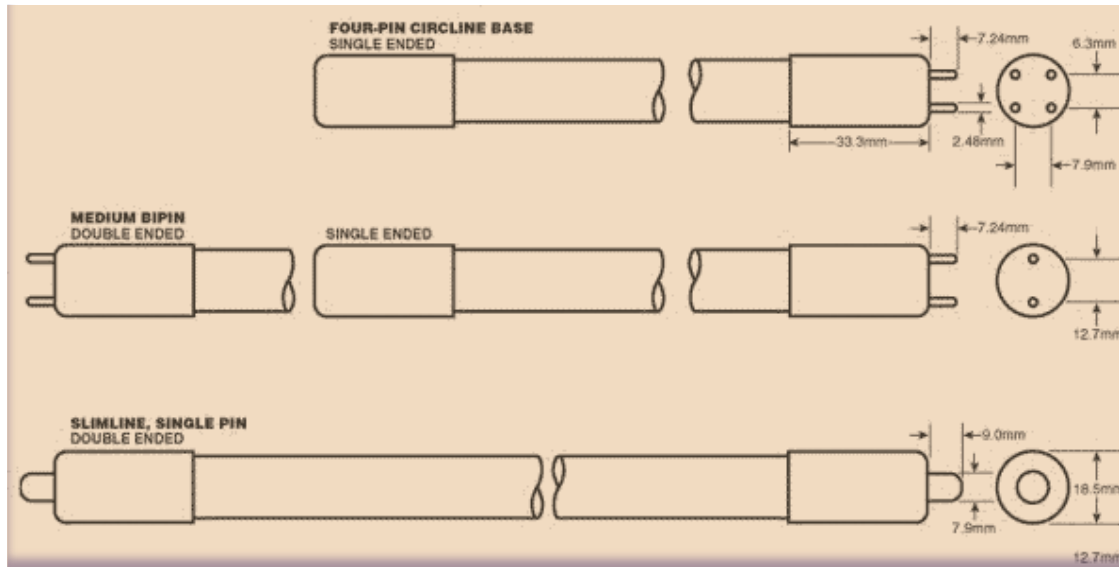

## 預熱型高輸出低壓汞殺菌燈(High output UV lamp)

高輸出低壓汞殺菌燈有別於傳統低壓汞殺菌燈書出UV功率可以更高出1/3-2/3，燈腳集中在燈的一端力於電線差頭的連接於日後維護抽換一邊即可 此型燈可分為無臭氧輸出或臭氧輸出兩類型供客戶選擇

型 號	尺寸規格					燈的操作規格				
	管徑	Base Face Length		Arc Length		Lamp	Lamp	Lamp	UV	Output
	Dia	Inches	mm	Inches	mm	Watts	Current	Voltage	Output	@ 1M
	mm					W(1)	mA	V@60Hz	W	uW/cm2
GPH436T5L/HO/4PSE	15	17.2	436	14.2	360	40	610	86	8	75
GPH436T5/VH/HO/4PSE	15	17.2	436	14.2	360	40	610	86	8	75
GHO36T5/L/4PSE	15	33.2	842.4	28	710	84-105	800-1000	120	27-34	250-280
GHO36T5/VH/4PSE	15	33.2	842.4	28	710	84-105	800-1000	120	27-34	250-280

型 號	尺寸規格					燈的操作規格				
	管徑	Base Face Length		Arc Length		Lamp	Lamp	Lamp	UV	Output
	Dia mm	Inches	mm	Inches	mm	Watts W(1)	Current mA	Voltage V@60Hz	Output W	@ 1M uW/cm2
GPH846T5/L/HO/4PSE	15	33.3	846	30.2	767	65	775	110	18	165
GPH846T5/VH/HO/4PSE	15	33.3	846	30.2	767	65	775	110	18	165
GPH893T5/L/HO/4PSE	15	35.2	893	32.1	815	65	750	114	19	170
GPH893T5/VH/HO/4PSE	15	35.2	893	32.1	815	65	750	114	19	170
GHO64T5/L/4PSE	15	61.2	1553.6	55.9	1421	155-193	800-1000	220	45-58	380-486
GHO64T5VH/4PSE	15	61.2	1553.6	55.9	1421	155-193	800-1000	220	45-58	380-486

(1) At line frequencies (50 or 60Hz) the lamp wattage is not simply the product of the lamp voltages and current. This product of the lamp voltage and current. This product must be multiplied by the apparent power factor (approximately At high 0.8) to determine the true wattage. frequency (>10Khz) the power factor is unity (one and the wattage is obtained as the product of voltage and current.